




System Include

Chamber capsule, Oil free air compressor,
5 liter oxygen concentrator, Air Cooler,
internal metal frame, mattress, muffler, internal
pressure gauge, oxygen breathing headset,
air&oxygen hose, spare air filters

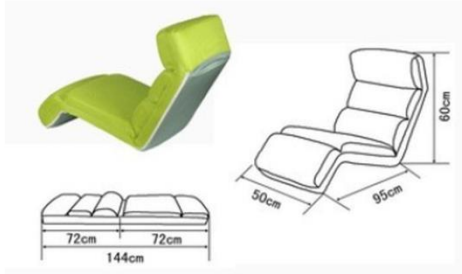

Mattress contoured to fit inside the chamber

Soft and comfortable

Removable easy to clean

External pressure gauge

Internal and external high-precision pressure gauge, allowing you to control pressure changes at any time



Convenient internal pressure gauge



High sensitivity inside and outside the emergency relief valve

Allow to control the pressure both outside and
inside the capsule





Automatic Safety Pressure Relief Valve

Muffler

High-frequency precision silencer, the perfect isolation of external noise, enjoy high-quality rest



Anti-Roll Bolsters

High-quality sponge on the rotating base, safer and more stable in the cabin



Oxygen Concentrator

The oxygen concentrator takes the air out of the room, cleans it through the filters. Then, using the PSA Pressure Swing Adsorption, the air is separated into oxygen and nitrogen. The oxygen produced during adsorption is fed to the pressure chamber. Capacity 5 l / min, O₂ saturation 95%, power 480W, 220 V. Weight 27 kg. Casing on wheels for more convenient movement of the device.



Air Compressor

The air compressor takes air from the room, cleans it, and feeds it through the air conditioner into the chamber throughout the entire session to maintain the working pressure. The compressor capacity is 73liters / min. The compression time of the altitude chamber is 5 minutes. Power 480W, 220V. Weight 18 kg.



Air Cooler

The cooling system cools the air supplied to the chamber by the compressor-cleaned air.

Flow speed of 150 l./min. Power 240W, 220V.
Weight 5 kg

www.hiperbarice.ro

HELVETIC IMPEX SRL

Romania | Brasov – 500058

Street Bucegi 1B

primo@sunjoy.ro

+40 755-098.486